




MOKAY[®]
— COATING EXPERT —

Architectural Series
Rock Stone



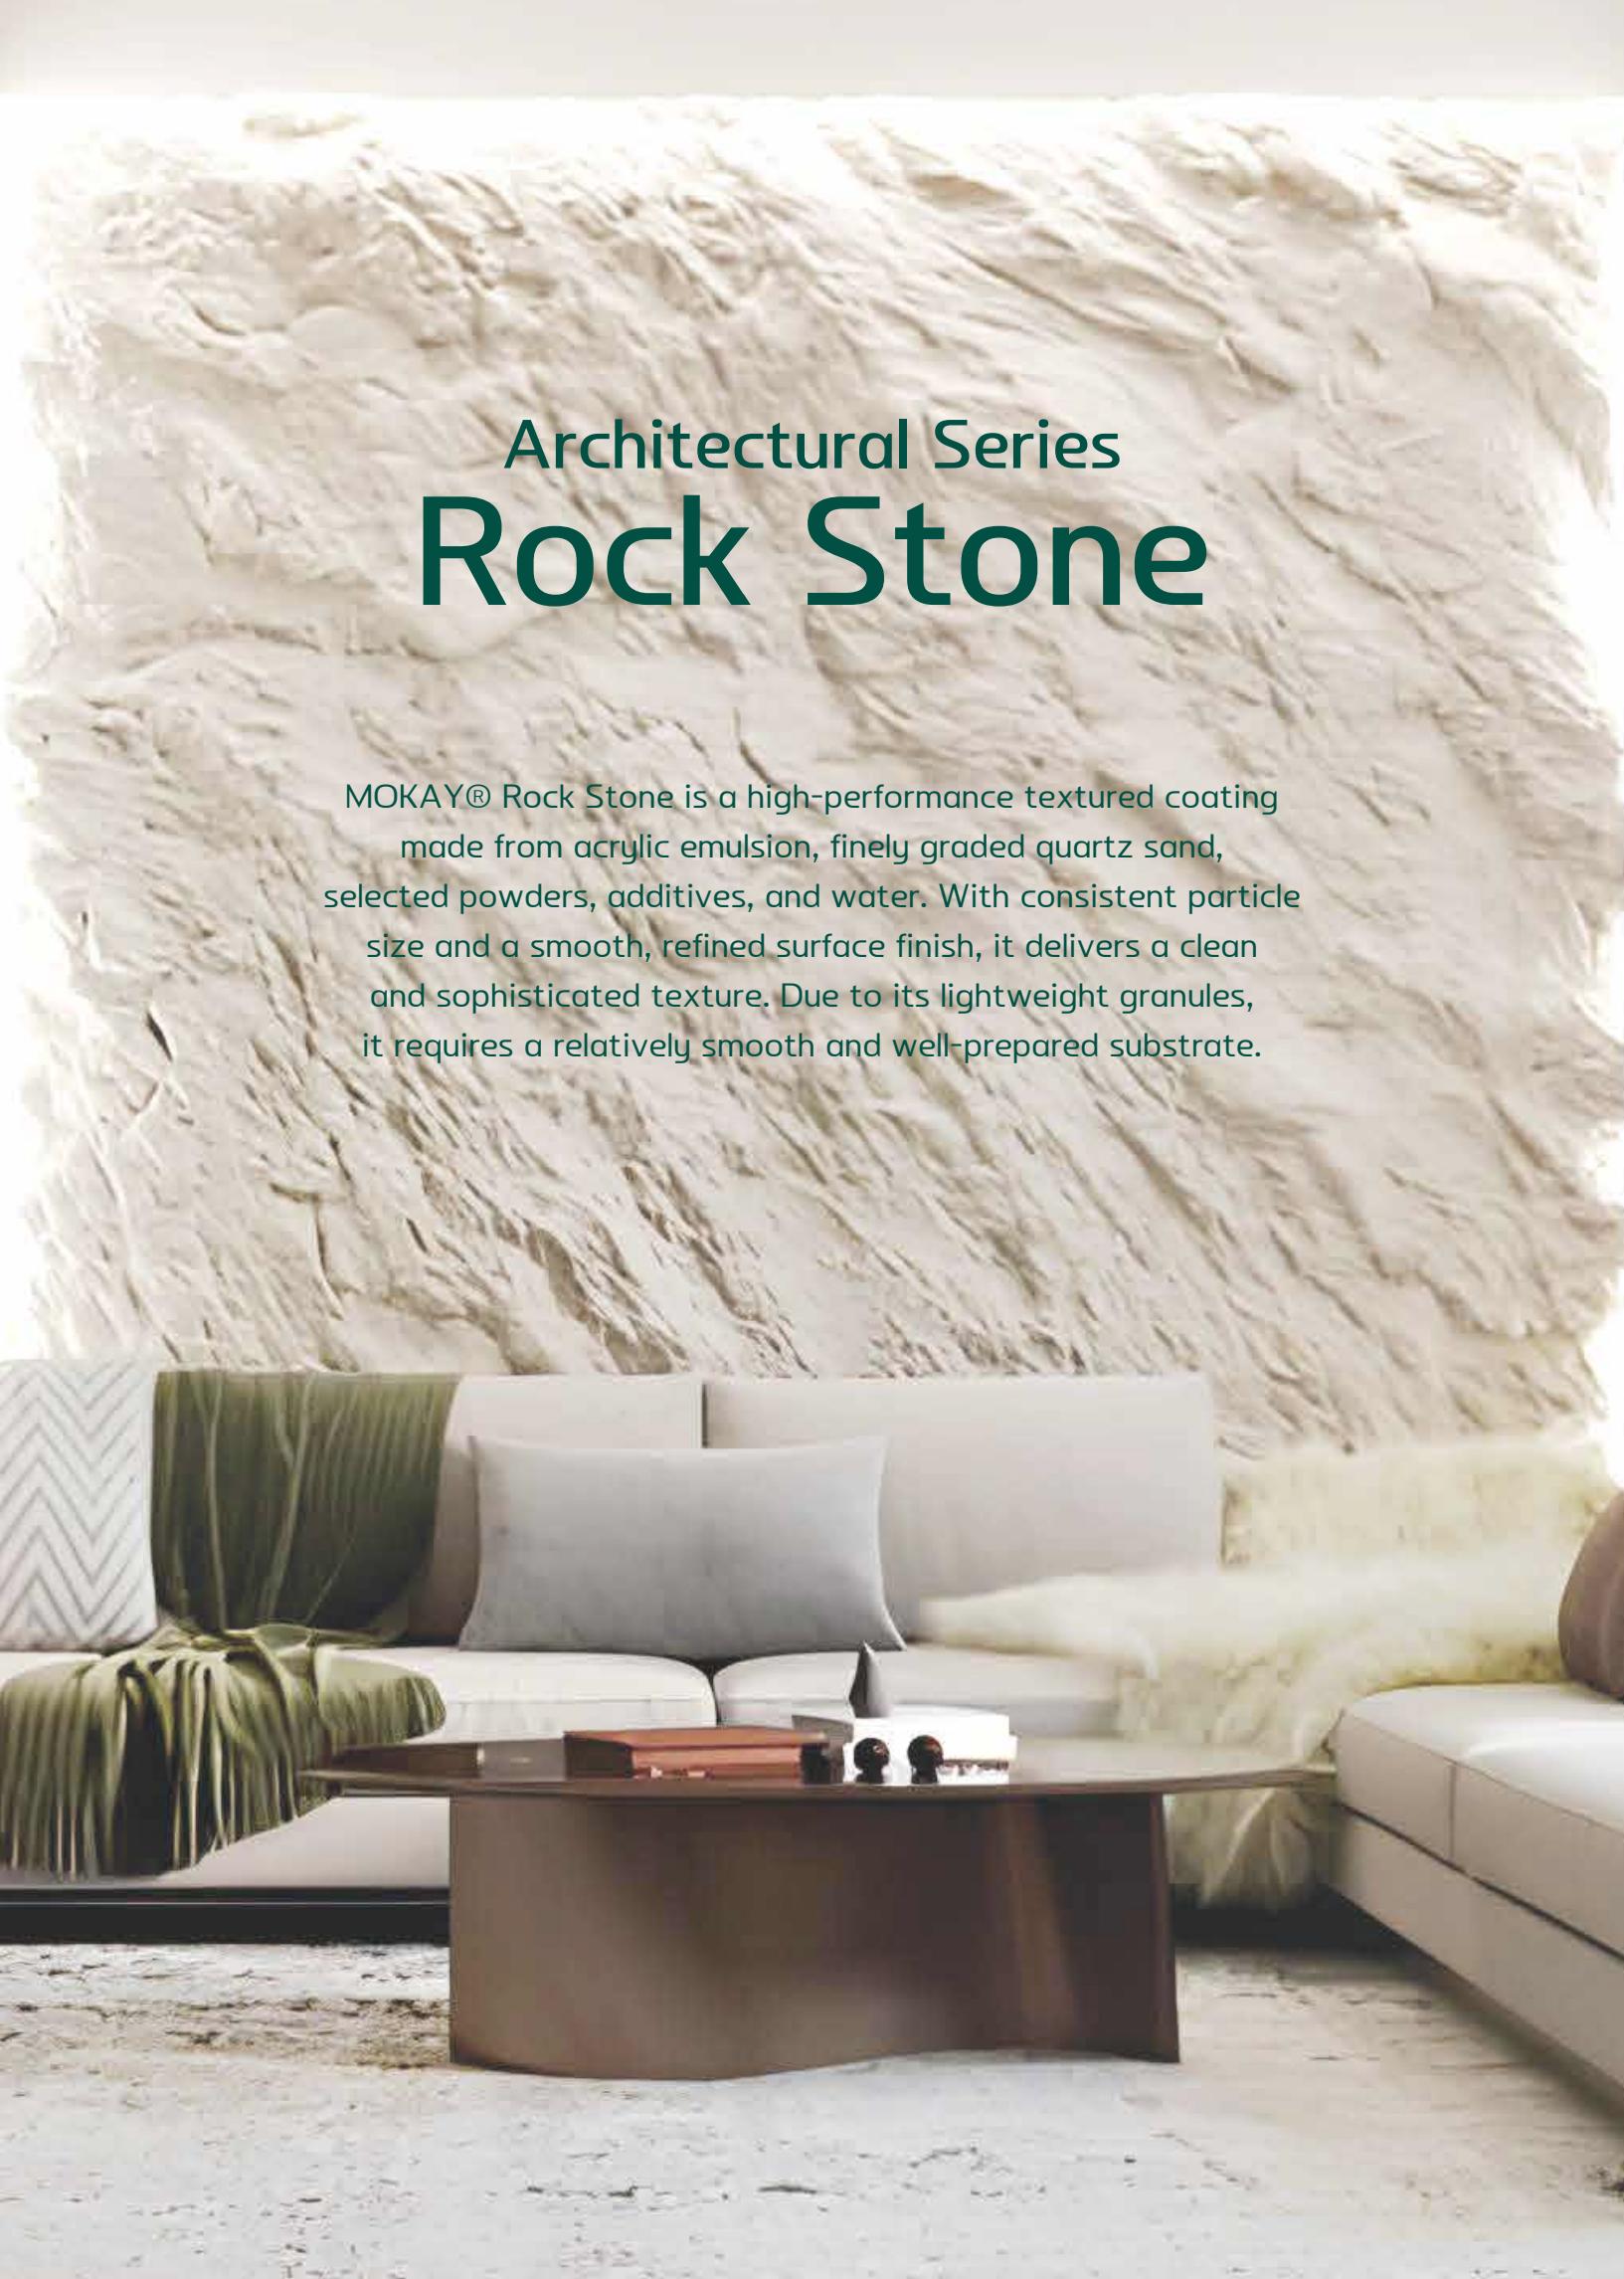

Architectural Series Rock Stone

MOKAY® Rock Stone is a high-performance textured coating made from acrylic emulsion, finely graded quartz sand, selected powders, additives, and water. With consistent particle size and a smooth, refined surface finish, it delivers a clean and sophisticated texture. Due to its lightweight granules, it requires a relatively smooth and well-prepared substrate.



Rock Stone Product Features



Unique 3D
Texture



Natural Rock
Stone Texture



European Stone
Aesthetic



Anti-Crack
Properties



High Hardness
Level



Weather
Resistance



Water
Resistance



Alkali
Resistance



Wear
Resistance



Protection against
Fungus & Algae



Easy to
Maintain



Long-Lasting
(Lifespan of over 15 years)

Applicable Substrates

Suitable for all kinds of building internal and external walls, columns, calcium silicate boards, gypsum boards, cement fiber boards and so on.

Rock Stone Coating Structure




1 Internal and External Walls



2 Architectural Columns



3 Calcium Silicate Boards

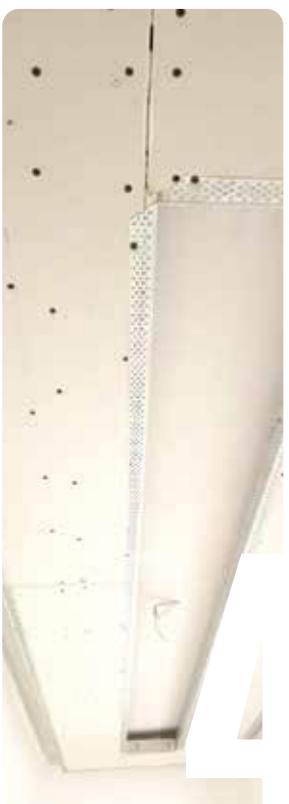

4 Gypsum Boards




5 Cement Fiber Boards

Scope of Application


It is suitable for the interior and exterior wall decoration and protection of various high-grade buildings.




Interior
Hotels

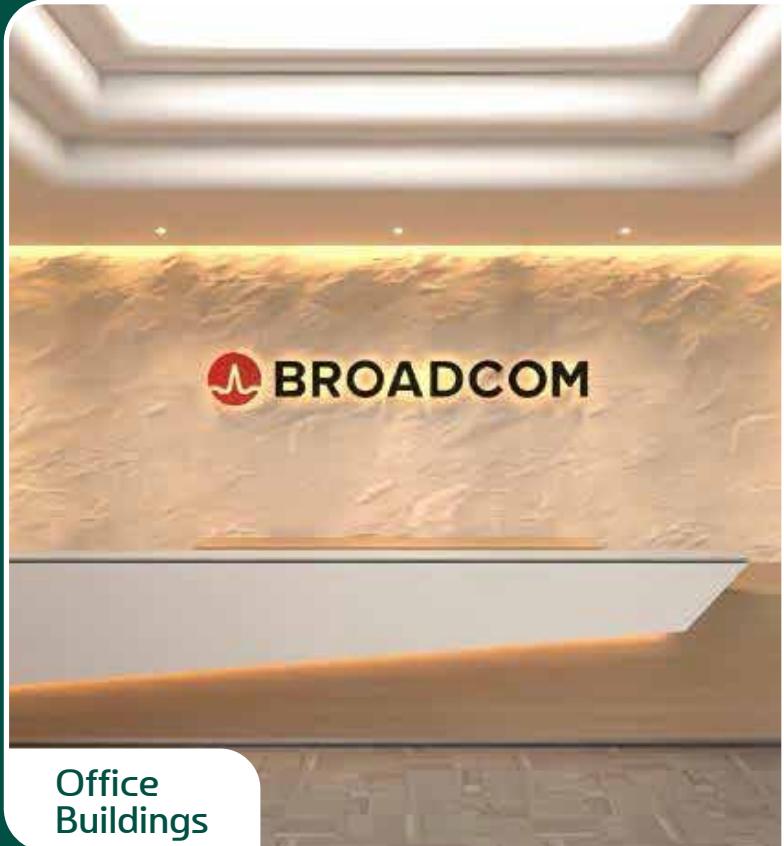

Office
Buildings

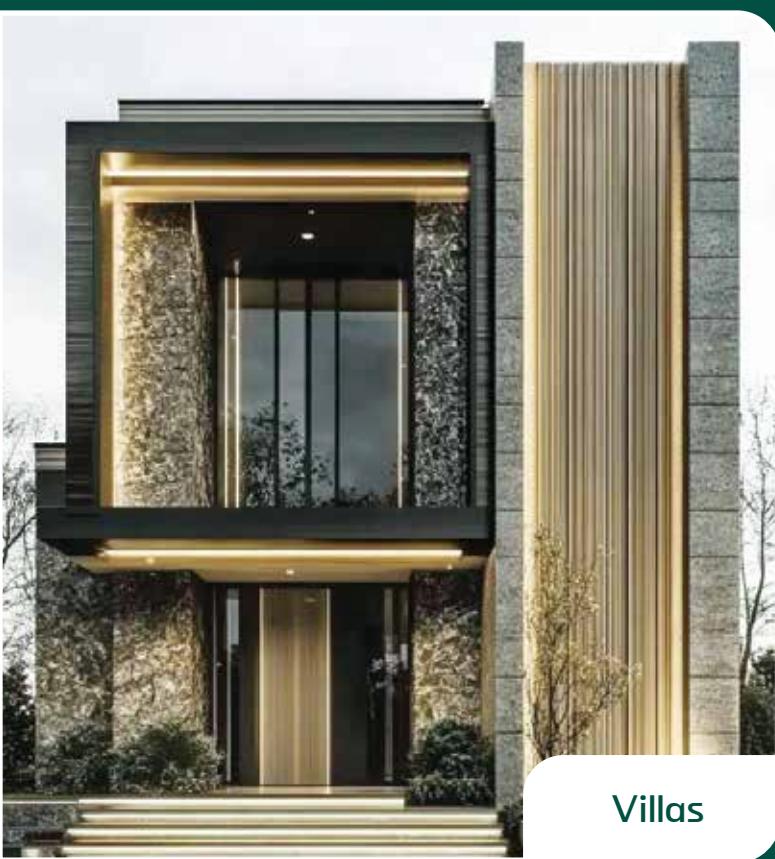

Villas

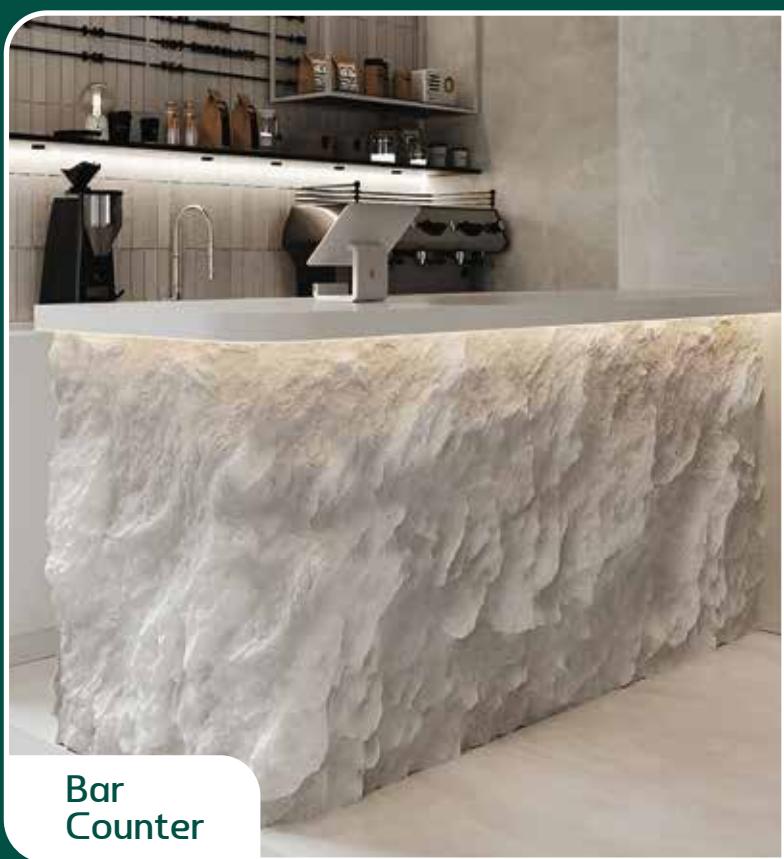

Bar
Counter

Scope of Application

Process	Material	Dilution (in water)	Theoretical Usage (sqft)		Tools
1	Surface Preparation	Remove dirt, dust, remove hollow drums, repair leveling			
2	Primer	Primer	Not recommended for water	5kg	40 to 45m ² /1layer
3	Rock Stone (Powder)	Rock Stone Powder	Can be appropriately diluted with water	25kg	6 to 7m ²
4	Rock Stone (Premix)	Rock Stone Premix	Can be appropriately diluted with water	25kg	12 to 15m ²
5	Top Coat	Top Coat	No dilution required	18kg	60 to 65m ² /2layers



IMPORTANT NOTE:

1. Installation optimal temperature: 5°C to 40°C; Relative humidity: below 85%.
2. If trowel marks appear, gently smooth with a clean trowel to eliminate them.
3. Always clean your trowel with a damp brush between applications.
4. Avoid applying under direct sunlight when temperatures exceed 30°C.
5. Do not use different batch numbers on the same façade to ensure uniformity.
6. Protect adjacent surfaces during spraying (e.g., floors, windowsills, downpipes, decorative stone).
7. Clean tools promptly after application.

Rock Stone Portfolio



Rock Stone White



Rock Stone Black



Rock Stone White



Rock Stone White



mokaymalaysia.com



mokaymalaysia



+604-611 7363 / +604-645 2873



info@mokaymalaysia.com



4L, Tingkat Kenari, Sungai Ara,
11900, Bayan Lepas, Penang,
Malaysia.



* The product images in this catalog may vary slightly due to differences in lighting conditions and printing processes.
* We recommend examining actual product samples before making an order.