



MOKAY[®]
— COATING EXPERT —

Architectural Series
Rock Stone

Edition 2

Color depicted are for reference only, actual shades may very slightly from the images displayed.



Architectural Series Rock Stone

MOKAY® Rock Stone is a high-performance textured coating made from acrylic emulsion, finely graded quartz sand, selected powders, additives, and water. With consistent particle size and a smooth, refined surface finish, it delivers a clean and sophisticated texture. Due to its lightweight granules, it requires a relatively smooth and well-prepared substrate.

Rock Stone Product Features



**Unique 3D
Texture**



**Natural Rock
Stone Texture**



**European Stone
Aesthetic**



**Anti-Crack
Properties**



**High Hardness
Level**



**Weather
Resistance**



**Water
Resistance**



**Alkali
Resistance**



**Wear
Resistance**



**Protection against
Fungus & Algae**



**Easy to
Maintain**



**Long-Lasting
(Lifespan of over 15 years)**

Applicable Substrates

Suitable for all kinds of building internal and external walls, columns, calcium silicate boards, gypsum boards, cement fiber boards and so on.

Rock Stone Coating Structure



Internal and External Walls



Architectural Columns



Calcium Silicate Boards



Gypsum Boards



Cement Fiber Boards

Scope of Application


It is suitable for the interior and exterior wall decoration and protection of various high-grade buildings.



Interior
Hotels



Office
Buildings

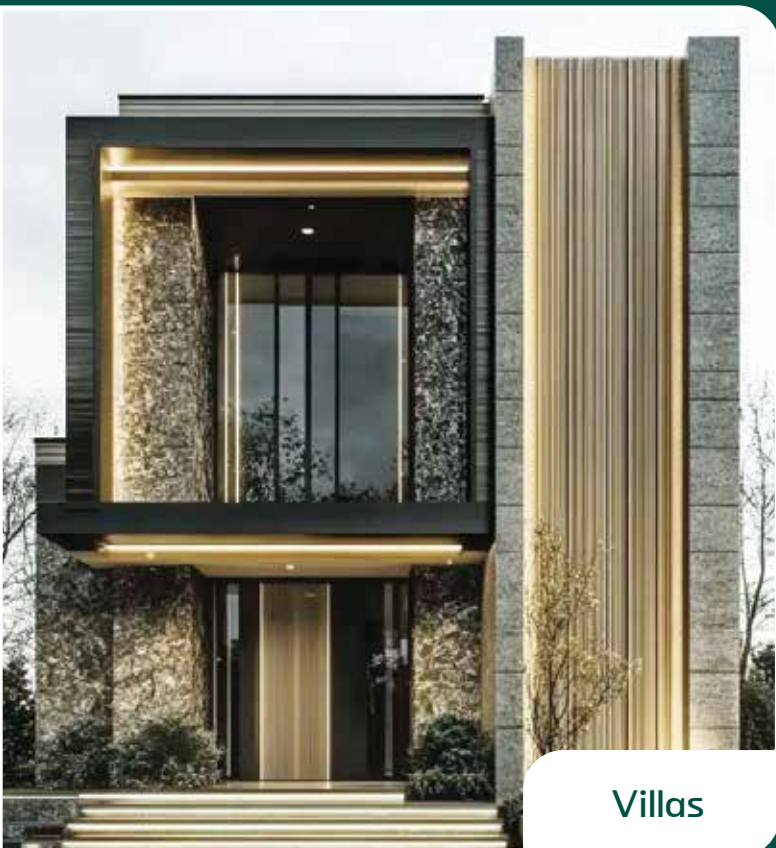

Villas



Bar
Counter

Scope of Application

Process	Material	Dilution (in water)	Theoretical Usage (sqft)		Tools
Rock Stone (Powder)	Rock Stone Powder	Can be appropriately diluted with water	25kg	6 to 7m ²	Trowel, Hand
Rock Stone (Premix)	Rock Stone Premix	Can be appropriately diluted with water	25kg	12 to 15m ²	Brush



IMPORTANT NOTE:

1. Installation optimal temperature: 5°C to 40°C; Relative humidity: below 85%.
2. If trowel marks appear, gently smooth with a clean trowel to eliminate them.
3. Always clean your trowel with a damp brush between applications.
4. Avoid applying under direct sunlight when temperatures exceed 30°C.
5. Do not use different batch numbers on the same façade to ensure uniformity.
6. Protect adjacent surfaces during spraying (e.g., floors, windowsills, downpipes, decorative stone).
7. Clean tools promptly after application.


Rock Stone Portfolio



Rock Stone White



Rock Stone Black

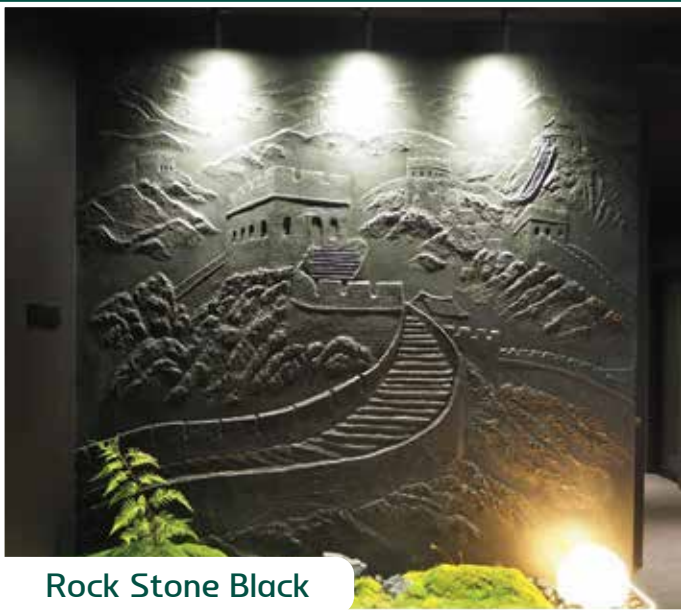

Rock Stone Black



Rock Stone White



Rock Stone White



mokaymalaysia.com



mokaymalaysia



+604-611 7363 / +604-645 2873



info@mokaymalaysia.com



Penang (Headquarter)

**4L, Tingkat Kenari, Sungai Ara,
11900 Bayan Lepas,
Penang, Malaysia.**

Selangor (Branch)

**41, Jalan Utara PJS 12,
Petaling Jaya, 46200
Selangor, Malaysia.**

* The product images in this catalog may vary slightly due to differences in lighting conditions and printing processes. We recommend examining actual product samples before making an order.

